

# **THE DYNAMICS OF COBBLES IN AND NEAR THE SURF ZONE**

and

## **MINE MOVEMENT IN AND NEAR THE SURF ZONE**

Don L. Boyer, P.I.  
Harindra J.S. Fernando, Co-P.I.  
Sergey I. Voropayev, Co-P.I.  
Arizona State University  
Department of Mechanical and Aerospace Engineering  
Tempe, AZ 85287-6106  
phone: (480) 965-1382, fax: (480) 965-1384, e-mail: [don.boyer@asu.edu](mailto:don.boyer@asu.edu)  
Award # N00014-95-1-0543 and N00014-97-1-0616

### **LONG-TERM GOAL**

The long-term goal of this program is to develop, by laboratory experimentation, theoretical analyses and comparisons with field observations, a basic understanding and, eventually, a predictive capability of the behavior of large bottom particles (cobbles) in the shoaling, wave-breaking and swash zones. The American Geophysical Union defines cobbles as particles in the diameter range 6.4 to 25.6 cm. Disk-shaped anti-tank mines are of similar size.

### **SCIENTIFIC OBJECTIVES**

The scientific objectives of this research are directed toward better understanding (a) the motion of cobbles on sloping beaches which have a range of roughness characteristics, and (b) the motion and/or burial/scouring of cobbles on sloping beaches that are permeable and have sand bed forms that are non-stationary as forced by the local current and wave motions.

The objectives for the impermeable floor case are to (i) mimic the water motion in a shoaling region of a surf zone in a large wave tank and to obtain information on the background water velocity field, (ii) extend the models of cobble transport, previously developed for idealized basic time-dependent flows, to include spatially and temporally-dependent flow in a surf zone, and (iii) obtain experimental data on the transport of cobbles in the model surf zone and test the model against the experimental data.

The objectives of the permeable sandy floor case are to (i) study the evolution of an initially flat sandy bottom in periodic wave-induced flow and clarify the long-time dynamics of the bottom topography, (ii) enhance the database on the process of burial/scouring of cobbles on a sandy bed and (iii) determine the eventual long-time fate of model cobbles.

### **APPROACH**


Carefully designed laboratory experiments are key to the achieving of stated scientific goals. The experiments were conducted using wave tanks located at Arizona State University. One of the tanks (32 x 1.8 x 0.9 m) includes a computer-controlled wave maker and a sloping beach; the facility can accommodate solid as well as sandy beaches. Acoustic Doppler velocimeter (ADV), wave gauges, traversing platforms, data acquisition systems and other standard methods are used to determine the

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>30 SEP 1999</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-1999 to 00-00-1999</b>	
4. TITLE AND SUBTITLE <b>The Dynamics of Cobbles in and Near the Surf Zone and Mine Movement in and Near the Surf Zone</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Arizona State University, Department of Mechanical and Aerospace Engineering, Tempe, AZ, 85287</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>5</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			


background flow characteristics. Cobble motions are monitored by employing video cameras and the resulting data are analyzed using standard software. Based on the results of experiments, theoretical models will be developed and tested.



(a)

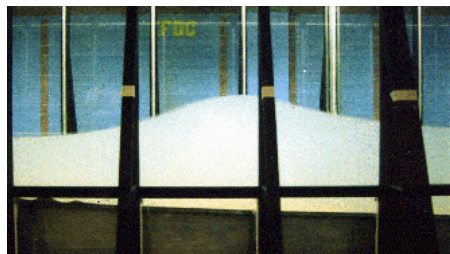

(b)



(c)


**Figure 1.** (a) Side view of the central part of the large wave tank, 32 x 0.9 x 1.8 m. Numbers show the sections as counted from the wave maker, which is at the right end of the tank. The distance between vertical bars is 61 cm. (b) Typical non-linear wave propagating from right to left in the central part of the tank. (c) Cobble 2 (replica of anti-tank mine) during its forward motion (from right to left) in section 29.

## WORK COMPLETED


Periodic and spatially dependent water motion in a shoaling surf zone was mimicked in the large wave tank with a slope (Fig. 1a), which was constructed under the present grant. Data on the water velocity induced by periodic progressive waves propagating along the slope (Fig. 1b) were taken at different depths and distances along the slope and were analyzed. Large disk-shaped bottom particles (Fig. 1c) of different sizes and densities were placed on a slope with artificial roughness and their motion in a model surf flow was studied. The models for cobble motion, which were developed previously for idealized basic flows configurations (Luccio et al., 1998; Voropayev et al., 1998), were refined and extended to the flow conditions being considered. The results of observations were compared with model estimates.

## RESULTS

Our research for the FY 99 was concentrated mostly on cobble motions along the slope under conditions similar to those occurring in a shoaling surf zone with an impermeable bed. The principal outcomes to date are as follows.

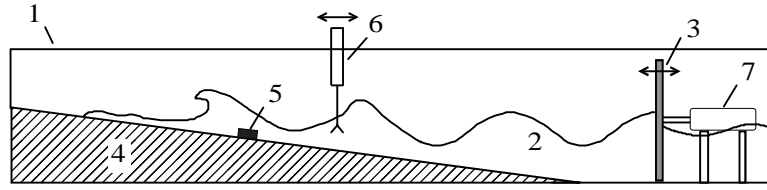


(a)

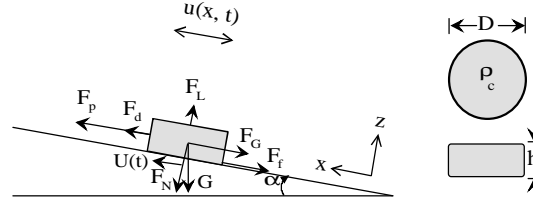


(b)

**Figure 2.** (a) Schematic diagram of the experimental system: 1 - tank, 2 - water, 3 – vertical wave-maker (frequency  $\omega$ , horizontal displacement  $\epsilon$ ), 4 – sloping bottom, 5 – cobble, 6 – acoustic Doppler velocimeter (ADV) attached to carriage, 7 – hydraulic system to move the wave maker. (b) Definition sketch with coordinate system and periodic forces that act on a cobble placed on a sloping beach in a surf zone.

For the flow configuration used, there is no satisfactory theory that may be used to estimate accurately the water particle velocities  $u(x,t)$  associated with the motion of non-linear waves propagating along the slope. As these data are needed to calculate accurately the cobble motion, direct measurements were made using a three-component acoustic Doppler velocimeter (ADV). The initial data on velocity were obtained as time series at points in different sections of the tank and at different distances from the bottom, and then were phase averaged. Typical examples are shown in Fig. 3. These data were used as inputs for model calculations.

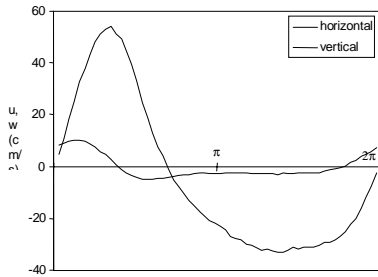


(a)

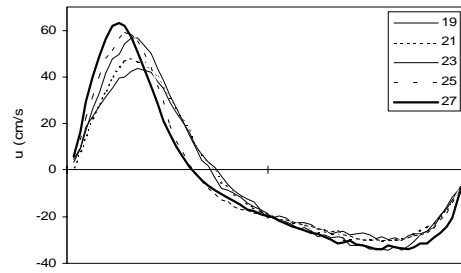

(b)

**Figure 3.** (a) Horizontal ( $u$ ) and vertical ( $w$ ) components of the water velocity under a periodic wave along the slope. Section #25, depth is 10 cm above the bottom. The data are averaged over 40 wave periods. (b) Horizontal water velocities ( $u$ ) as function of position in the wave tank. The data were taken in sections #19, 21, 23 25 and 27 at depth 10 cm from the bottom. Standard phase averaging was applied. Section numbers are shown in the legend.

In the experiments, cobbles of different sizes were placed along the floor and their motion with time was studied and compared with the theoretical predictions. Onshore and offshore mean motions of cobbles, as well as steady oscillations with zero mean displacement, were observed for different conditions; some typical examples are shown in Figs. 4. For the range of parameters used in the experiments, satisfactory agreement between the measured and calculated values of cobble displacements as a function of time was obtained.

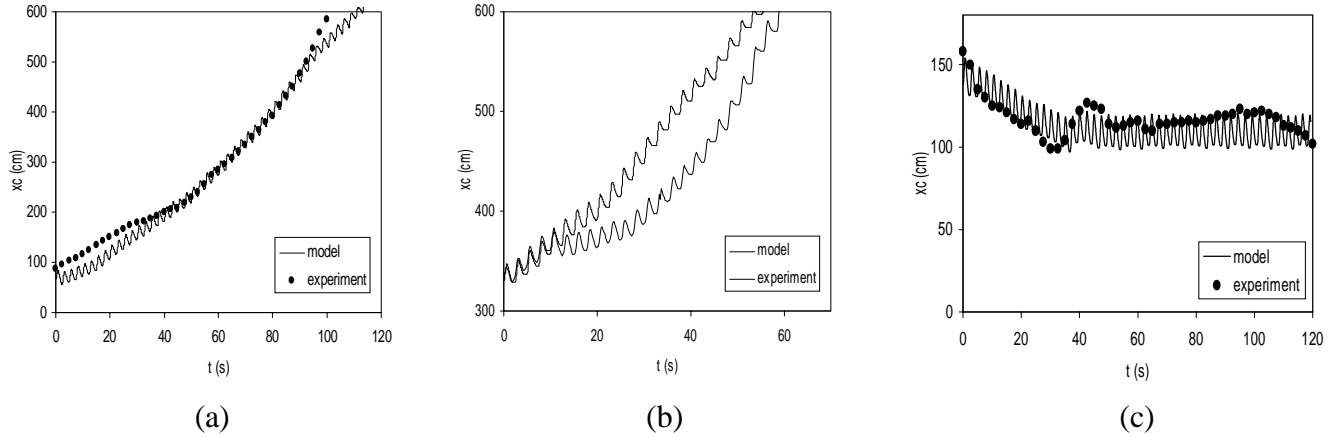

**Figure 4.** Calculated and measured cobble positions  $x_c$  as a function of time  $t$ : (a) for cobble B, which was placed above the critical position for onshore motion; (b) for cobble 1, which was placed above the critical position; (c) for cobble 1, which was placed below the critical position and moved offshore.

The model takes into account all governing parameters (size and density of cobbles, bottom slope, dynamic and static friction at the bottom, background flow characteristics). Standard parameterizations were used for a pressure accelerating term, drag, lift and other nonlinear forces. Comparison of measured and calculated values for the cobble displacement shows that the model is practically insensitive to the vertical accelerating pressure term, and is sensitive to the dynamic friction. The use of static friction does not improve predictions and makes predictions only worse. One of the most important variables in the model, which is known with the least accuracy, is the virtual mass coefficient for a disc moving with variable velocity along a solid boundary. Fixed values were used for this coefficient, as were for drag and lift coefficients. Note that the spatial variation of the periodic background velocity along the slope must be taken into account in calculations. If this is not done, the cobbles move with some constant net velocity along the slope in contrast with observations. The main results are reported in Voropayev et al. (1999b).

Recently, the far more complex (and more realistic) case of sand covered floors was studied under this grant for a simplified background flow induced by periodic standing waves (Voropayev et al. 1999 a). Since the long-time instability of the bottom topography observed in these studies will be of great importance for periodic burring of cobbles in a surf zone, a series of related experiments was conducted in a model surf zone. The main efforts are concentrated on cobble behavior in the presence of the sandy movable coastal floor. In these preliminary experiments, a layer of sand was placed on the slope in the large wave tank and the long-time evolution of the bottom topography was studied. At present the results are being analyzed.

## **IMPACT/APPLICATIONS**

The transport of "heavy particles", such as cobbles, on a sloping bottom submerged in a periodic spatially dependent flow, typical of a surf zone, is not well understood from a fundamental point of view. The present project is an integrated laboratory, theoretical and field program that seeks to better understand this complex physical problem.

## **TRANSITIONS**

Discussions between Dr. Todd Holland from the Naval Research Laboratory and project personnel at Arizona State University are being held to develop a knowledge base that can be transitioned to the Navy.

## **RELATED PROJECTS**

This project is linked to a field observational and modeling program that was carried out by personnel of the Naval Research Laboratory (NRL) at the Stennis Space Center under the direction of Dr. Todd Holland. Close collaboration between the laboratory/theoretical studies at Arizona State University and the mine-motion observation/modeling studies of NRL is being effected.

## **REFERENCES**

- Luccio, P.A., Voropayev, S.I. Fernando, H.J.S., Boyer, D.L., Houston, W.N. 1998. The motion of cobbles in the swash zone on an impermeable slope. *Coastal Engineering*, **33**, 41-60.
- Voropayev, S.I., Roney, J., Boyer, D.L., Fernando, H.J.S., Houston, W.N. 1998. The motion of large bottom particles (cobbles) in a wave-induced oscillatory flow. *Coastal Engineering*, **34**, 197-219.
- Voropayev, S.I., McEachern, G.B., Boyer, D.L., Fernando, H.J.S. 1999a. Dynamics of sand ripples and burial/scouring of cobbles in oscillatory flow. *Applied Ocean Research*, **21**, 249-261.
- Voropayev, S.I., Cense, A.W., McEachern, G.B., Boyer, D.L. and Fernando, H.J.S. 1999b. Dynamics of cobbles in the shoaling region of surf zone. *Applied Ocean Research*, submitted.
- Krstic, R. and Fernando, H.J.S. 1999. The nature of rough-wall oscillatory boundary layers. *Journal of Hydraulic Engineering*, submitted.
- Voropayev, S.I., Cense, A.W., McEachern, G.B. 1999. Cobble dynamics in the wave-breaking region along an impermeable slope. In: *Abstracts of Fifteenth Arizona Fluid Mechanics Conference*. Tucson, Arizona, April 23-24, 1999, p. 2-3.
- McEachern, G.B., Voropayev, S.I., Boyer D.L., and Fernando H.J.S. 2000. Laboratory studies on the dynamics of cobbles in a surf zone. In *Abstracts of the AGU 2000 Ocean Sciences Meeting*. January 24-28, 2000, San Antonio, Texas, submitted.